


RHAS-SP V1.3-03E VIEWER

Comparison: Correction-Method: SAE

CAP2

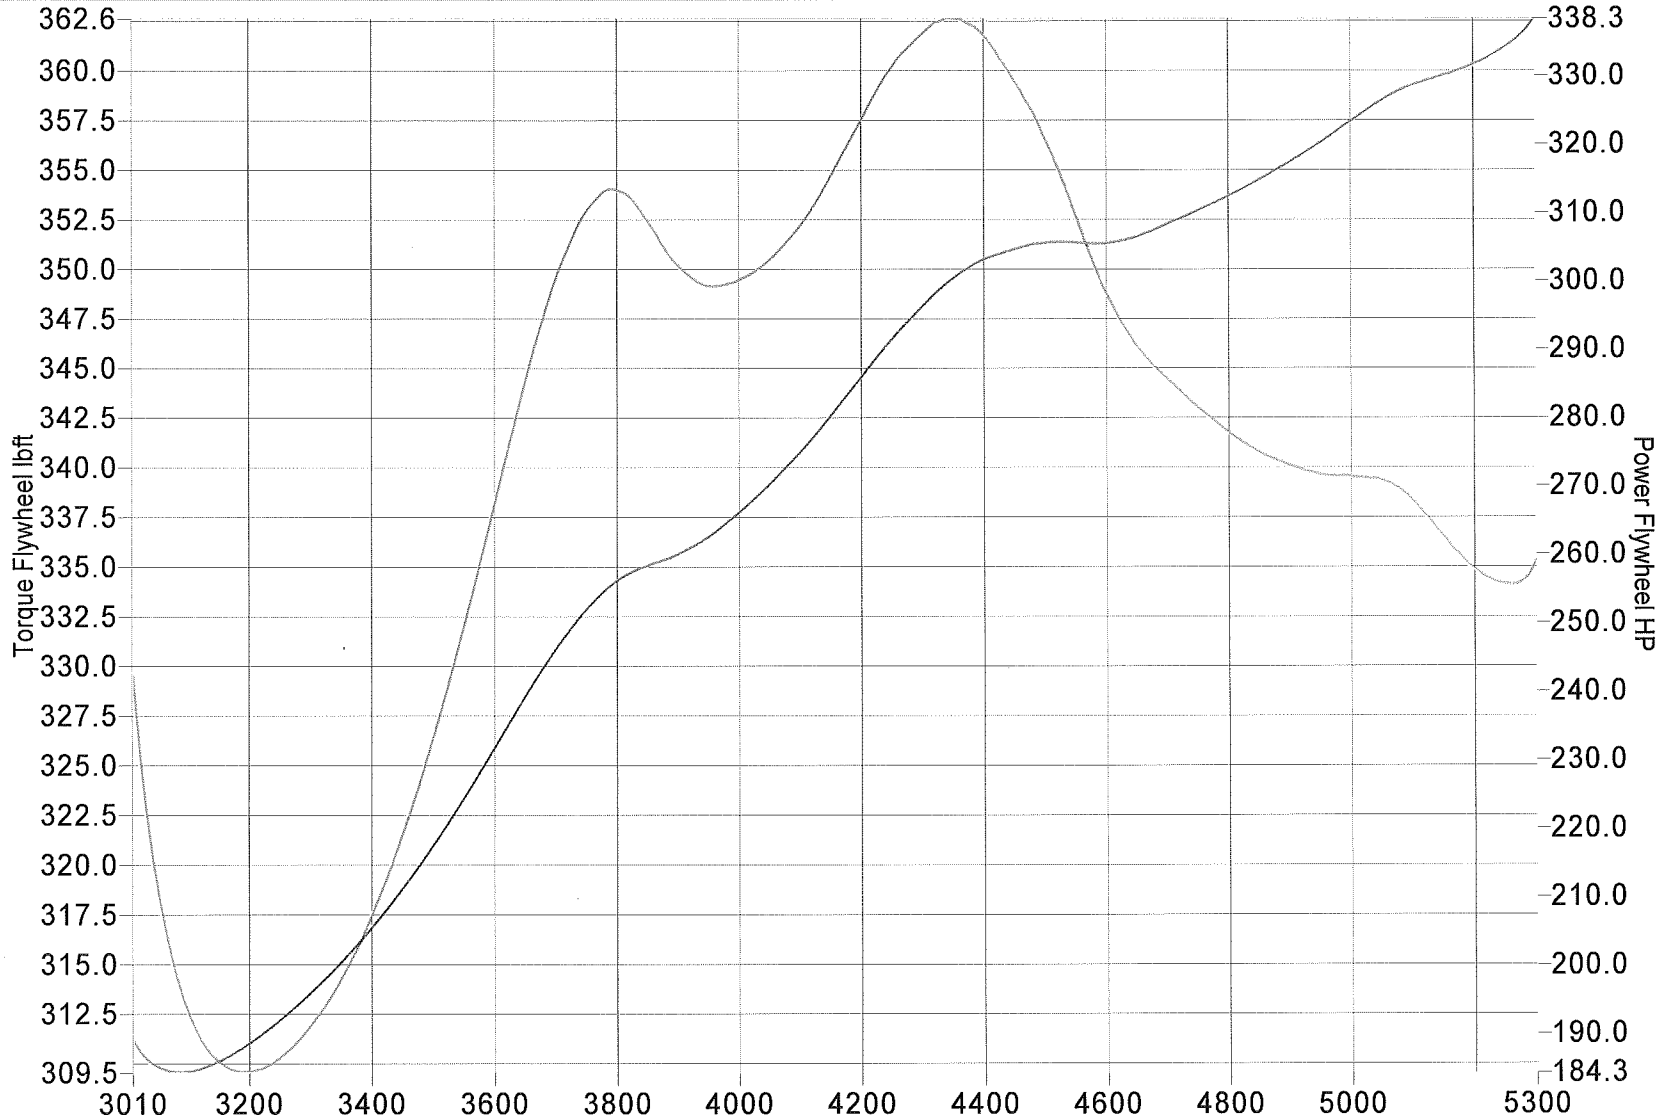

Accel 0.5044
Distance 64.7

Plot 1 (Thick)

X Axis

Y Axis (Left)

Y Axis (Right)

Show Ave. Show Lock Data Cursor

Plot 2 (Thin)

Comparison AP 2

Eng rpm

Torque Flywheel



Power Flywheel

Log Data (LGS)

Folder: 2011f150302

Run ID: 4inchsingl

Date: 20-Jul-2011 20:30:23

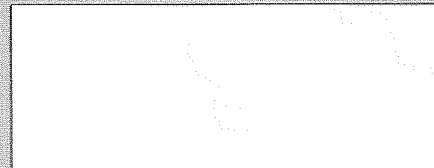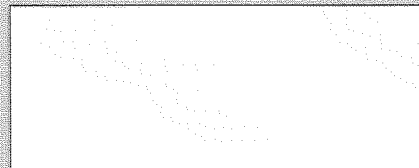

Folder:

Run ID:

Date:

Vehicle Folder: 2011f150302
 Date: 20-Jul-2011
 Time: 20:30:23
 Run ID: 4inchsingle
 Run No: 2


Correction Method: SAE

Vehicle Specification
 Wheel Diameter (mm): 600.0
 Weight (Kg): 1400.00
 Drive Ratio: 5.32000000
 Trans.C. Factor: 1.000000
 Gearbox: MANUAL
 Gear: 4
 Control Mode: CUSTOM

Run Comment:



EngRPM	TorqFly lbft	PowFly HP	Temp °F	MAP PSI	Lambda	AFR	PCRatio P/PC	Time sec	Baro InHg						T.Effort lb
3010	329.438	188.788	98.8	-0.58	0.00	0.00	1.11593	0.000	28.694						1780.65
3100	312.399	184.390	98.9	-0.56	0.00	0.05	1.11615	0.350	28.694						1688.55
3200	309.569	188.614	98.9	-0.56	0.00	0.05	1.11630	0.554	28.694						1673.26
3300	311.923	195.987	98.9	-0.57	0.00	0.05	1.11627	0.741	28.695						1685.98
3400	317.535	205.559	98.9	-0.55	0.02	0.23	1.11614	0.930	28.695						1716.31
3500	326.461	217.553	98.8	-0.61	0.00	0.00	1.11596	1.132	28.695						1764.56
3600	338.190	231.808	98.6	-0.59	0.00	0.01	1.11553	1.364	28.695						1827.96
3700	349.469	246.194	99.0	-0.56	0.01	0.10	1.11643	1.647	28.695						1888.92
3800	353.963	256.099	99.1	-0.61	0.00	0.00	1.11650	1.982	28.695						1913.21
3900	350.138	259.998	98.6	-0.55	0.01	0.11	1.11539	2.298	28.695						1892.54
4000	349.434	266.151	98.9	-0.56	0.01	0.16	1.11617	2.555	28.696						1888.73
4100	352.160	274.910	98.9	-0.59	0.00	0.04	1.11612	2.782	28.695						1903.47
4200	357.484	285.855	99.0	-0.55	0.00	0.00	1.11654	3.014	28.695						1932.24
4300	361.861	296.263	98.7	-0.62	0.00	0.05	1.11570	3.286	28.695						1955.90
4400	361.742	303.053	98.9	-0.55	0.01	0.11	1.11609	3.588	28.695						1955.26
4500	356.545	305.487	99.0	-0.61	0.00	0.03	1.11646	3.890	28.695						1927.17
4600	348.729	305.430	98.6	-0.63	0.00	0.05	1.11554	4.171	28.695						1884.92
4700	344.411	308.206	98.9	-0.56	0.00	0.02	1.11616	4.425	28.695						1861.58
4800	341.737	312.320	98.8	-0.57	0.00	0.00	1.11593	4.669	28.695						1847.13
4900	340.041	317.245	99.1	-0.57	0.00	0.00	1.11652	4.915	28.695						1837.96
5000	339.495	323.199	98.6	-0.55	0.00	0.04	1.11542	5.165	28.695						1835.01
5100	338.274	328.477	98.8	-0.60	0.00	0.04	1.11604	5.430	28.695						1828.41
5200	334.871	331.548	98.9	-0.58	0.00	0.07	1.11610	5.697	28.695						1810.02
5300	335.265	338.322	98.9	-0.56	0.01	0.08	1.11615	6.008	28.695						1812.15

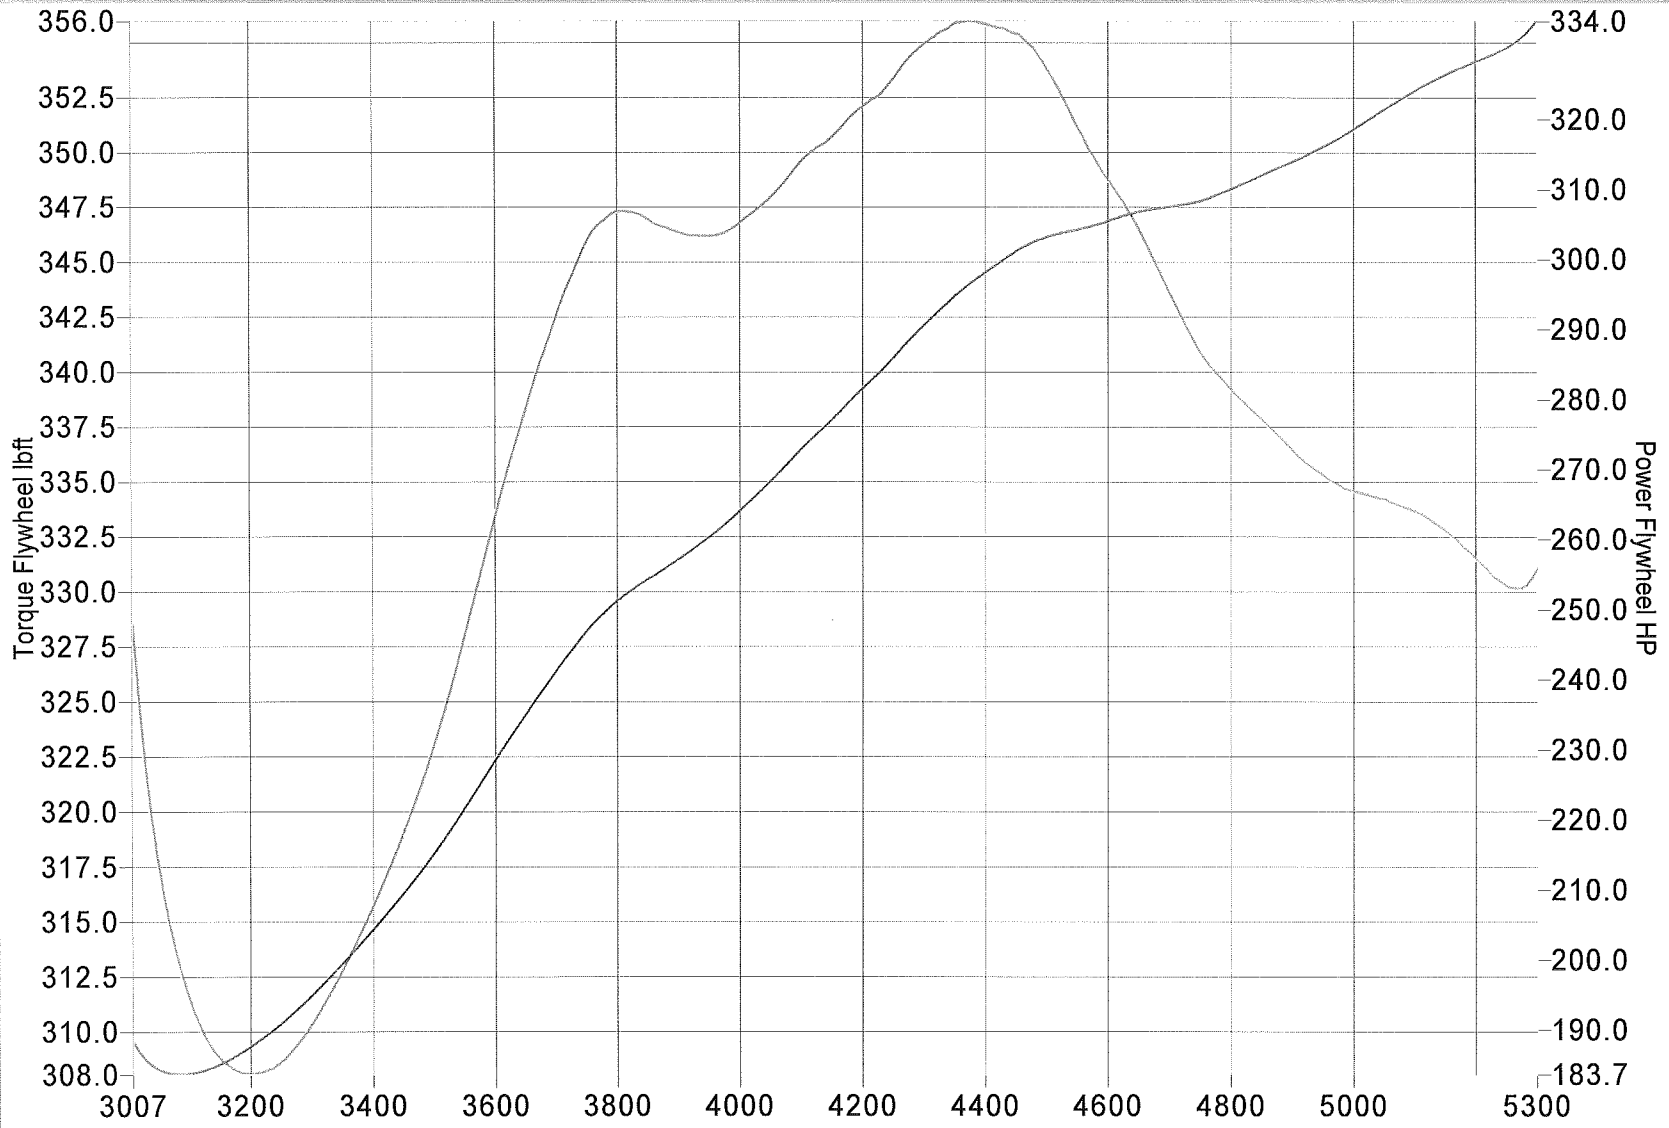

Accel 0.5500
 Distance 66.1

Plot 1 (Thick)

X Axis

Y Axis (Left)

Y Axis (Right)

Show Ave. Show Lock Data Cursor

Plot 2 (Thin)

Comparison AP 1

Eng rpm

Torque Flywheel



Power Flywheel

Comparison AP 6

Folder: 2011f150302

Run ID: stock

Date: 19-Jul-2011 18:22:11

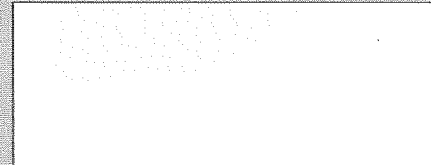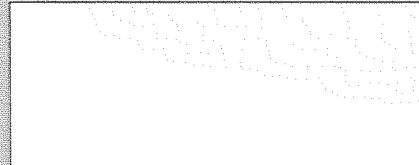

Folder: 2011f150302

Run ID: stock

Date: 19-Jul-2011 18:22:11

Vehicle Folder: 2011f150302
 Date: 19-Jul-2011
 Time: 18:22:11
 Run ID: stock
 Run No: 1

Correction Method: SAE

Vehicle Specification
 Wheel Diameter (mm): 600.0
 Weight (Kg): 1400.00
 Drive Ratio: 5.32000000
 Trans.C. Factor: 1.000000
 Gearbox: MANUAL
 Gear: 4
 Control Mode: CUSTOM

Run Comment:



EngRPM	TorqFly lbft	PowFly HP	Temp °F	MAP PSI	Lambda	AFR	PCRatio P/PC	Time sec	Baro InHg							T.Effort lb
3007	328.500	188.068	97.6	-0.61	0.01	0.08	1.11599	0.000	28.734							1775.58
3100	311.333	183.761	97.1	-0.55	0.00	0.00	1.11464	0.377	28.734							1682.79
3200	308.052	187.690	97.3	-0.55	0.01	0.09	1.11508	0.586	28.735							1665.06
3300	310.382	195.019	97.3	-0.55	0.01	0.09	1.11508	0.775	28.735							1677.65
3400	315.739	204.397	97.4	-0.55	0.00	0.00	1.11544	0.968	28.735							1706.61
3500	323.138	215.339	97.0	-0.57	0.00	0.03	1.11434	1.176	28.736							1746.60
3600	333.509	228.600	97.2	-0.57	0.00	0.00	1.11488	1.416	28.737							1802.66
3700	342.543	241.315	97.2	-0.55	0.00	0.02	1.11487	1.693	28.736							1851.49
3800	347.277	251.261	97.3	-0.56	0.00	0.00	1.11504	2.006	28.738							1877.07
3900	346.326	257.167	96.9	-0.55	0.00	0.05	1.11431	2.314	28.737							1871.93
4000	346.776	264.105	97.3	-0.55	0.00	0.01	1.11507	2.573	28.736							1874.37
4100	349.594	272.921	97.4	-0.54	0.00	0.06	1.11544	2.818	28.736							1889.60
4200	352.074	281.546	97.0	-0.57	0.00	0.00	1.11434	3.070	28.736							1903.00
4300	354.931	290.589	97.2	-0.56	0.00	0.00	1.11490	3.335	28.736							1918.45
4400	355.816	298.088	97.3	-0.56	0.00	0.00	1.11511	3.613	28.736							1923.23
4500	353.780	303.118	97.2	-0.58	0.00	0.00	1.11495	3.897	28.736							1912.22
4600	348.717	305.420	97.0	-0.54	0.01	0.17	1.11445	4.185	28.734							1884.86
4700	343.580	307.463	97.3	-0.60	0.01	0.10	1.11520	4.461	28.734							1857.09
4800	339.162	309.967	97.5	-0.57	0.00	0.01	1.11565	4.710	28.735							1833.21
4900	336.416	313.863	97.3	-0.56	0.00	0.06	1.11512	4.962	28.734							1818.37
5000	334.571	318.511	97.2	-0.56	0.00	0.00	1.11487	5.211	28.734							1808.40
5100	333.637	323.975	97.2	-0.55	0.01	0.09	1.11498	5.463	28.735							1803.35
5200	331.471	328.182	97.3	-0.60	0.00	0.00	1.11529	5.724	28.734							1791.64
5300	331.027	334.045	96.8	-0.56	0.00	0.03	1.11392	6.026	28.734							1789.24